


Male Boss O-Ring (MB)

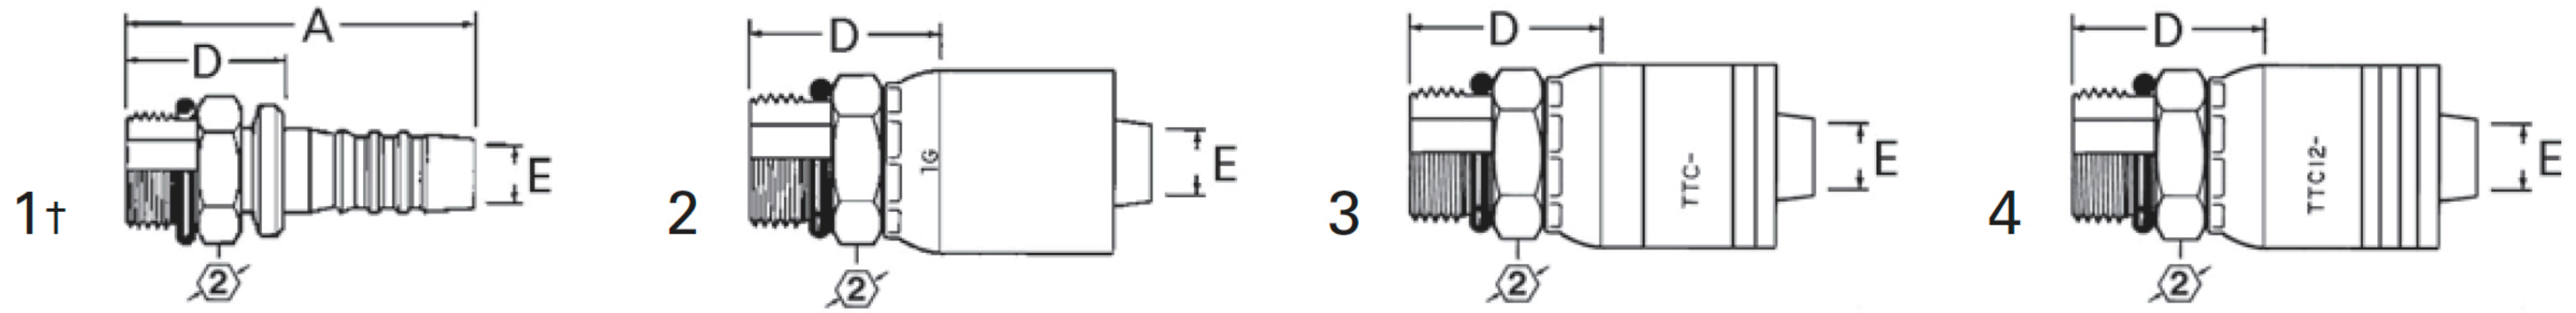

1†	2	3	4	Thd.	Hose Size	A		D		EØ		2
						mm	in	mm	in	mm	in	
1SA4MB4	1GA4MB4	1AA4MB4	—	7/16-20	-04	46,7	1.84	23,4	0.92	4,3	0.17	9/16
1SA5MB4	1GA5MB4	1AA5MB4	—	1/2-20	-04	46,7	1.84	23,4	0.92	4,3	0.17	5/8
1SA6MB4	1GA6MB4	1AA6MB4	—	9/16-18	-04	45,2	1.78	21,8	0.86	4,3	0.17	11/16
1SA6MB6	1GA6MB6	1AA6MB6	1BA6MB6	9/16-18	-06	50,8	2.00	25,4	1.00	6,6	0.26	11/16
1SA8MB6	1GA8MB6	1AA8MB6	1BA8MB6	3/4-16	-06	50,0	1.97	24,9	0.98	6,6	0.26	7/8
1SA8MB8	1GA8MB8	1AA8MB8	1BA8MB8	3/4-16	-08	59,9	2.36	30,2	1.19	9,7	0.38	7/8
1SA10MB8	1GA10MB8	1AA10MB8	1BA10MB8	7/8-14	-08	57,4	2.26	27,7	1.09	9,7	0.38	1
1SA12MB8	1GA12MB8	1AA12MB8	1BA12MB8	1 1/16-12	-08	60,7	2.39	31,0	1.22	9,7	0.38	1 1/4
1SA10MB10	1GA10MB10	1AA10MB10	1BA10MB10	7/8-14	-10	62,7	2.47	33,3	1.31	12,7	0.50	1
1SA12MB10	1GA12MB10	1AA12MB10	1BA12MB10	1 1/16-12	-10	60,7	2.39	31,2	1.23	12,7	0.50	1 1/4
1SA12MB12	1GA12MB12	1AA12MB12	1BA12MB12	1 1/16-12	-12	62,0	2.44	31,8	1.25	15,5	0.61	1 1/4
1SA16MB12	1GA16MB12	1AA16MB12	1BA16MB12	1 5/16-12	-12	65,0	2.56	34,8	1.37	15,5	0.61	1 1/2
1SA16MB16	1GA16MB16	1AA16MB16	1BA16MB16	1 5/16-12	-16	69,6	2.74	35,3	1.39	20,8	0.82	1 1/2
1SA20MB20	1GA20MB20	—	1BA20MB20	1 5/8-12	-20	92,2	3.63	48,3	1.90	26,7	1.05	1 7/8
—	—	1AR20MB20*	—	1 5/8-12	-20	92,2	3.63	48,3	1.90	26,7	1.05	1 7/8
—	—	1AV20MB20**	—	1 5/8-12	-20	92,2	3.63	48,3	1.90	26,7	1.05	1 7/8
1SA24MB24	1GA24MB24	1AA24MB24	1BA24MB24	1 7/8-12	-24	92,2	3.63	46,0	1.81	32,0	1.26	2 1/8

* Uses 1-wire braid hose socket.

**Uses 2-wire braid hose socket.

† Nipples do not include O-ring. See pages 194, 195 for o-rings.