




# Female SAE 45° Swivel (FS)

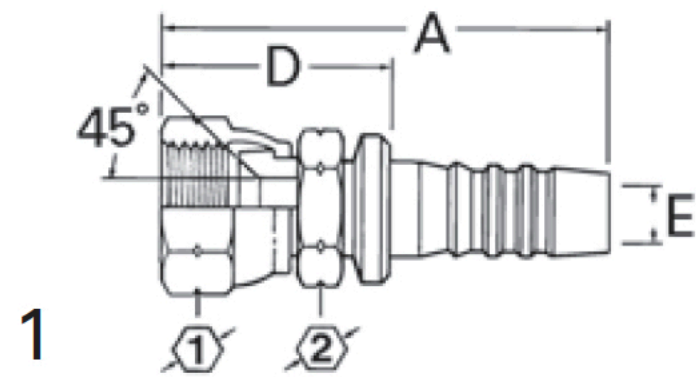


**Global Nipples** for use with  
**Hose:** *Clamp:* 2661 (-12 thru -20),  
 FC619 (-12 thru -20). *Socket*  
**1SA:** 2681, FC310, FC510, FC639/  
 FC839B (-4 thru -8), GH194  
 (-4 thru -20), GH663, GH681.  
**Socket 1SB:** 2781, FC195, FC466,  
 FC498, FC598, FC579, FC639/  
 FC839B (-10 thru -16), FC735 (-4  
 thru -20), FC849/FC849B (-06 thru  
 -12), GH120 (-4 thru -20), GH195,  
 GH781 (-04 thru -20), GH793, 2766.

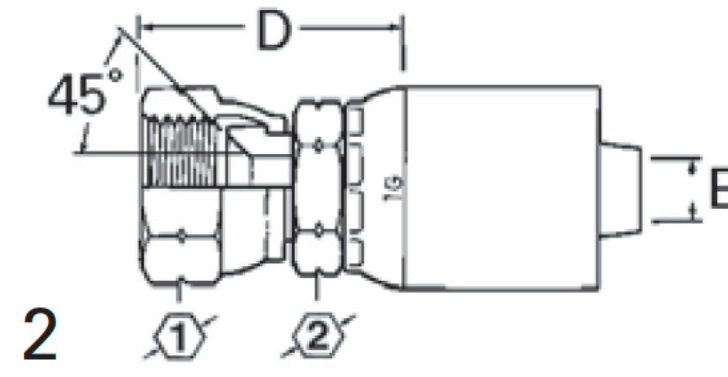

**Global OTC Fittings** for use with  
**Hose:** 2583, 2661, FC466, FC498,  
 FC598, FC619, FC699

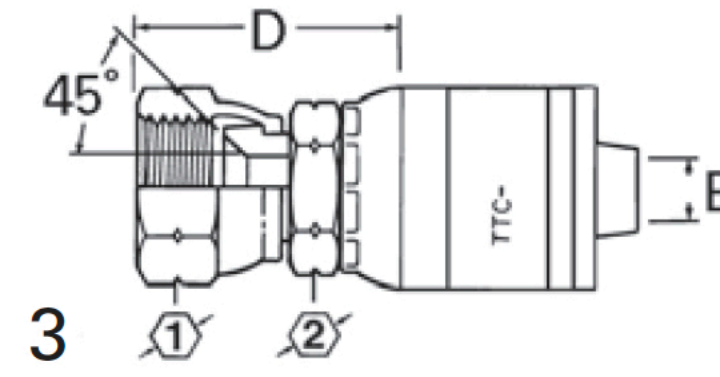

**Global TTC Fittings** for use with  
**Hose:** 2661(-12 thru -32), FC310,  
 FC510, FC579, FC611, FC619  
 (-12 thru -32), FC639/FC839B,  
 FC693, FC735, FC849/FC849B,  
 GH120, GH194, GH195, GH663,  
 GH681-6, GH781, GH793.

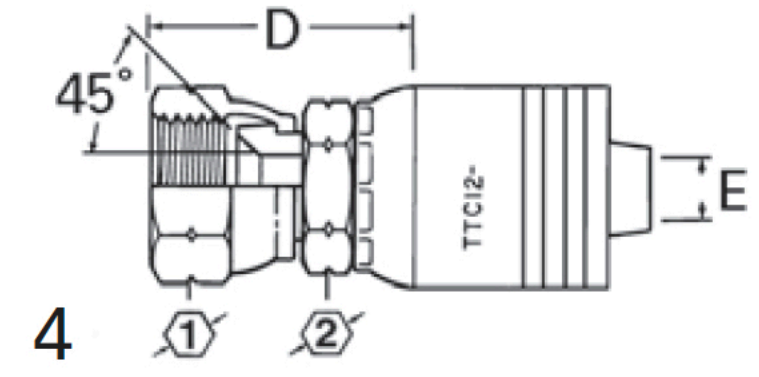

**Global TTC12 Fittings** for use  
 with **Hose:** FC636, FC736,  
 GH493, EC525.

1	2	3	4	Thd.	Hose Size	A		D		EØ		1	2
						mm	in	mm	in	mm	in	in	in
1SA4FS4	1GA4FS4	1AA4FS4	—	7/16-20	-04	50,8	2.00	27,2	1.07	4,3	0.17	9/16	9/16
1SA5FS4	1GA5FS4	1AA5FS4	—	1/2-20	-04	50,3	1.98	26,9	1.06	4,3	0.17	5/8	9/16
1SA4FS6	1GA4FS6	1AA4FS6	1BA4FS6	7/16-20	-06	55,6	2.19	30,2	1.19	4,8	0.19	9/16	11/16
1SA6FS6	1GA6FS6	1AA6FS6	1BA6FS6	5/8-18	-06	58,7	2.31	33,3	1.31	6,6	0.26	3/4	11/16
1SA8FS6	1GA8FS6	1AA8FS6	1BA8FS6	3/4-16	-06	58,7	2.31	33,3	1.31	6,6	0.26	7/8	11/16
1SA8FS8	1GA8FS8	1AA8FS8	1BA8FS8	3/4-16	-08	66,8	2.63	37,1	1.46	9,7	0.38	7/8	13/16
1SA10FS8	1GA10FS8	1AA10FS8	1BA10FS8	7/8-14	-08	67,1	2.64	37,3	1.47	9,7	0.38	1	13/16
1SA10FS10	1GA10FS10	—	—	7/8-14	-10	70,4	2.77	40,9	1.61	12,7	0.50	1	15/16
1SA12FS10	—	1AA12FS10	1BA12FS10	1 1/16-14	-10	69,1	2.72	39,9	1.57	12,7	0.50	1 1/4	1 1/16
1SA12FS12	1GA12FS12	1AA12FS12	1BA12FS12	1 1/16-14	-12	72,1	2.84	41,9	1.65	15,5	0.61	1 1/4	1 1/8