


# EC525 AQP High Temperature Four Spiral Wire

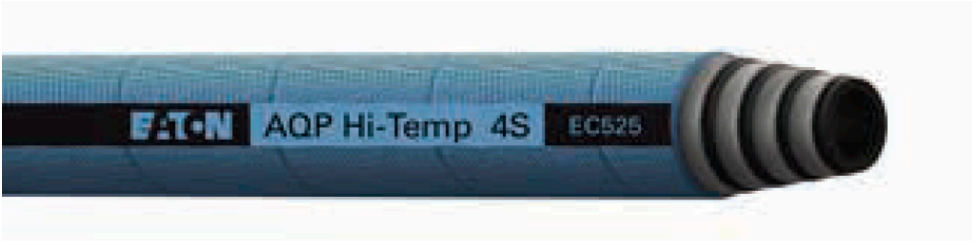

# Part Number	Hose I.D.		Hose O.D.		Maximum Operating Pressure		Burst Pressure		Minimum Bend Radius		Weight	
	mm	in	mm	in	bar	psi	bar	psi	mm	in	Kg/m	lbs/ft
EC525-12	19,1	0.75	31,5	1.24	345,0	5000	1380,0	20000	241,3	9.50	1,28	0.86
EC525-16	25,4	1.00	38,5	1.52	345,0	5000	1380,0	20000	304,8	12.00	1,73	1.16
EC525-20	31,8	1.25	47,5	1.87	240,0	3500	960,0	14000	419,1	16.50	2,30	1.55
EC525-24	38,1	1.50	54,9	2.16	240,0	3500	960,0	14000	508,0	20.50	2,95	1.99
EC525-32	50,8	2.00	68,5	2.70	225,0	3250	900,0	13000	635,0	25.00	4,40	2.97

**Construction**  
AQP elastomer tube, 4-spiral wire reinforcement and AQP elastomer high temperature cover.

**Operating Temperature Range**  
-40°C to +150°C [-40°F to +302°F]

**Application**  
Hydraulic system service with petroleum, fire-resistant, and water-base fluids, fuel, and lubricating systems. For more information on specific fluid applications and high temperature ratings, see pages 349-355.

**For Complete Agency Listings**  
See pages 346-348.

Fitting Reference	Page
<i>Crimp</i>	
TTC 12	66