


KanaVac HR (180 HR)

High temperature abrasion resistant suction hose

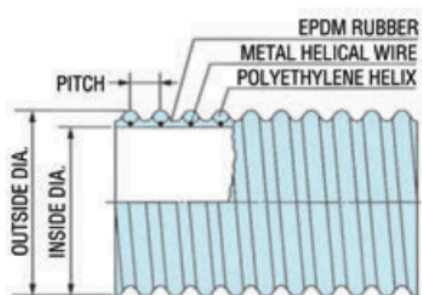

SPECIFICATIONS

Temp. Range: -40°F to 220°F

Applications: Heavy-duty suction applications where high temperature and abrasion are factors such as vacuum trucks or the handling of fly ash, crushed rock, sand, pea gravel or cement powder

Construction: EPDM rubber, polyethylene helix, metal helical wire, smooth bore, corrugated O.D.

Features: Lightweight and flexible. Integral wire helix can be grounded. External helix provides easy drag. Rated up to 220°F.

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
4	4.69	0.65	5.5	30	29.8	1.75	50,100
6	6.9	0.87	9.8	30	28.0	3.46	50,100
8	9.13	0.87	15.0	30	27.0	6.00	50



* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**